
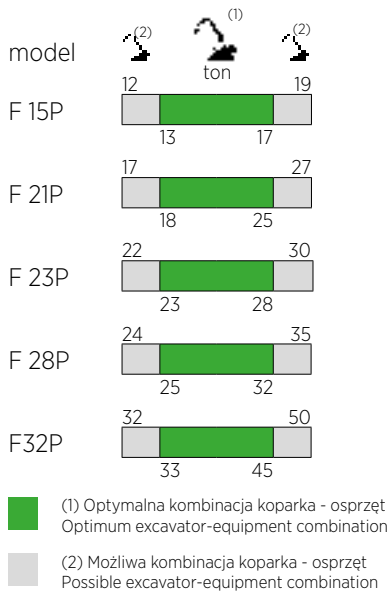


SZCZĘKI KRUSZĄCE BEZ OBROTU STATIONARY PULVERIZER

RECYKLING GRUZU BUDOWLANO
(ROZDRABNIANIE, SEPARACJA STALI,
PRZYGOTOWANIE MATERIAŁU
DO KRUSZARKI)

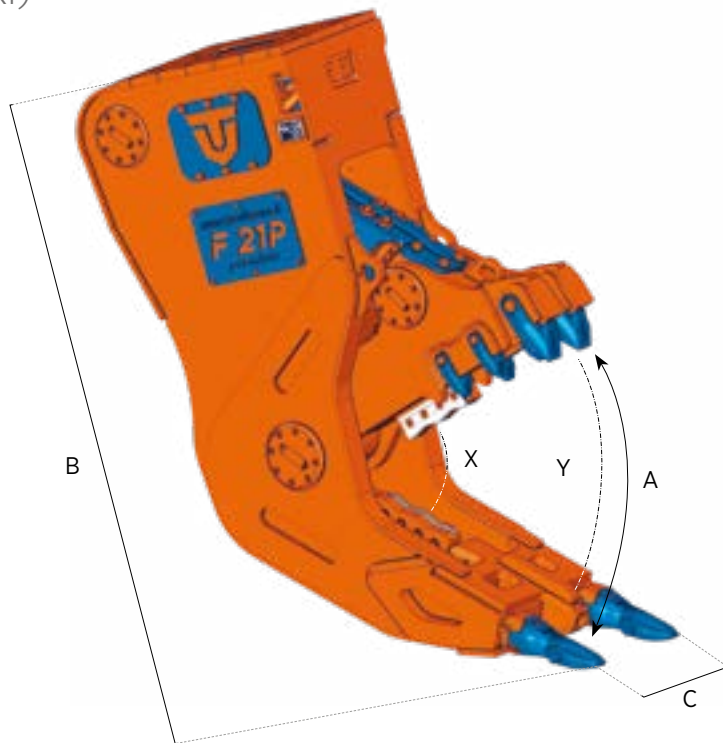

		F 15P	F 21P**	F 23P*	F 28P**	F32P*
	kg.	1370	2070	2470	2680	3290
	kg.	/	2420	/	3140	/
A	mm.	670	835	835	890	890
B	mm.	1600	1845	2215	1955	2365
C	mm.	460	540	540	670	670
	mm.	220	260	260	260	260
X	t.	205	250	250	270	270
Y	t.	90	100	100	115	115
Ø max	mm.	40	45	45	55	55
	bar	250	250	250	250	250
	l/min.	130 / 200	180 / 250	180 / 250	230 / 300	230 / 300
	bar	/	/	140	/	140
	l/min.	/	/	10	/	10
	bar	/	/	/	/	/

(*) Modele z układem obrotowym 360° / (*) Model equipped with continuous hydraulic 360° rotation



HARDOX
WEAR PLATE



HARDOX
IN MY BODY