







SERIA F

- SZCZĘKI KRUSZĄCE BEZ OBROTU
- STATIONARY PULVERIZER



SERIA F

- SZCZĘKI KRUSZĄCE BEZ OBROTU Z MAGNESEM
- STATIONARY PULVERIZER WITH MAGNET

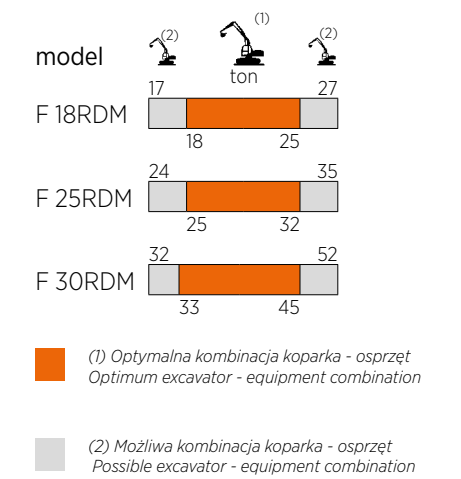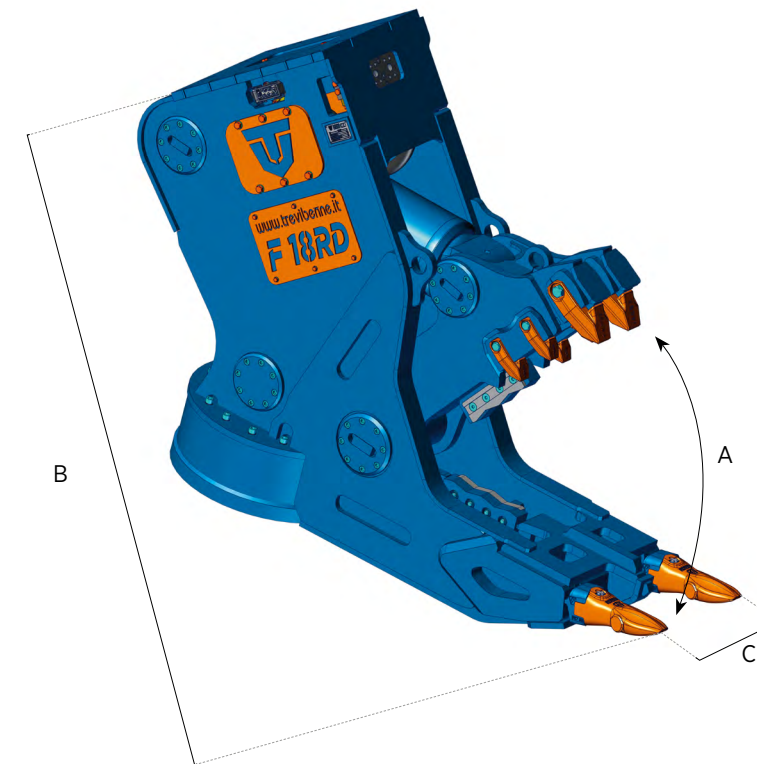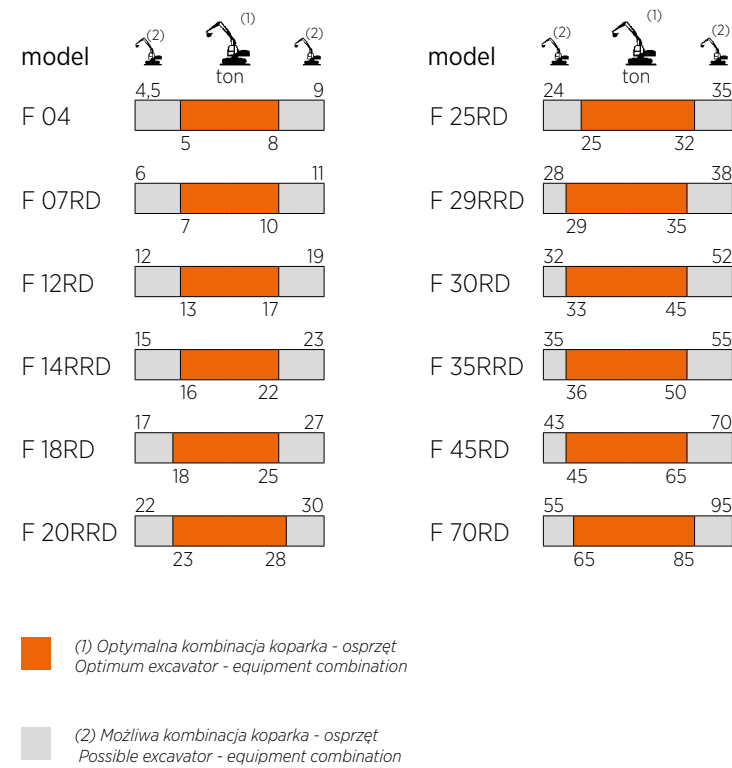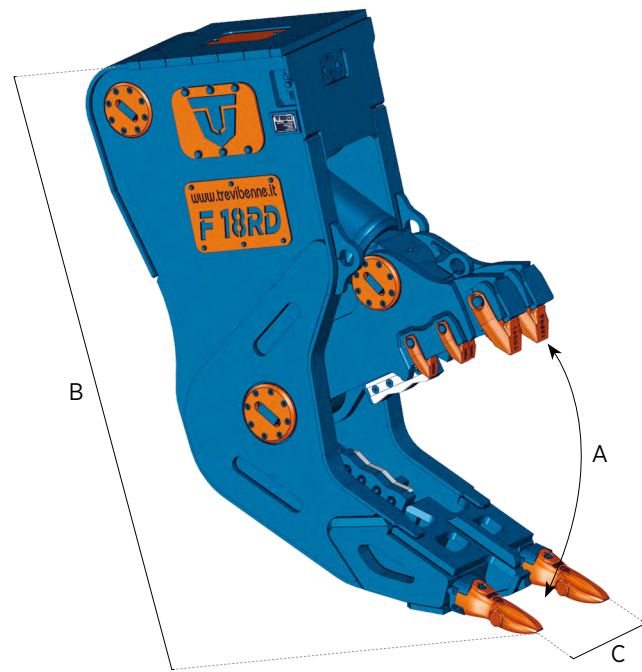

	F 04	F 07RD	F 12RD	F 14RRD*	F 18RD	F 20RRD*	F 25RD	F 29RRD*	F 30RD	F 35RRD*	F 45RD	F 70RD
kg	460	680	1250	1530	1990	2405	2650	3310	3070	3720	4490	6430
A mm	465	530	730	730	825	825	870	870	950	950	1130	1250
B mm	1475	1345	1600	2150	1845	2215	1955	2350	2100	2450	2415	2670
C mm	305	365	460	460	540	540	670	670	670	670	760	800
Ø max mm	20	25	30	30	40	40	45	45	50	50	60	75
max bar	320	320	350	350	350	350	350	350	350	350	350	350
l/min.	80 / 150	80 / 150	120 / 200	120 / 200	200 / 300	200 / 300	250 / 350	250 / 350	300 / 400	300 / 400	350 / 450	450 / 600
max bar	/	/	/	140	/	140	/	140	/	140	/	/
l/min.	/	/	/	10 / 20**	/	20 / 40**	/	25 / 50**	/	25 / 50**	/	/

*Model z układem obrotowym 360° / **Model equipped with continuous hydraulic 360° rotation
 *Podwójny silnik / **Double motor



	F 18RDM	F 25RDM	F 30RDM
kg	2390	3070	3850
Ø mm	660	770	770
A mm	825	870	950
B mm	1845	1955	2100
C mm	540	670	670
Ø max mm	40	45	50
max bar	350	350	350
l/min.	200 / 300	250 / 350	300 / 400
max bar	/	/	/
l/min.	/	/	/

