




SERIA FR

PREMIUM
line



IMPACT
BOOSTER
TECHNOLOGY

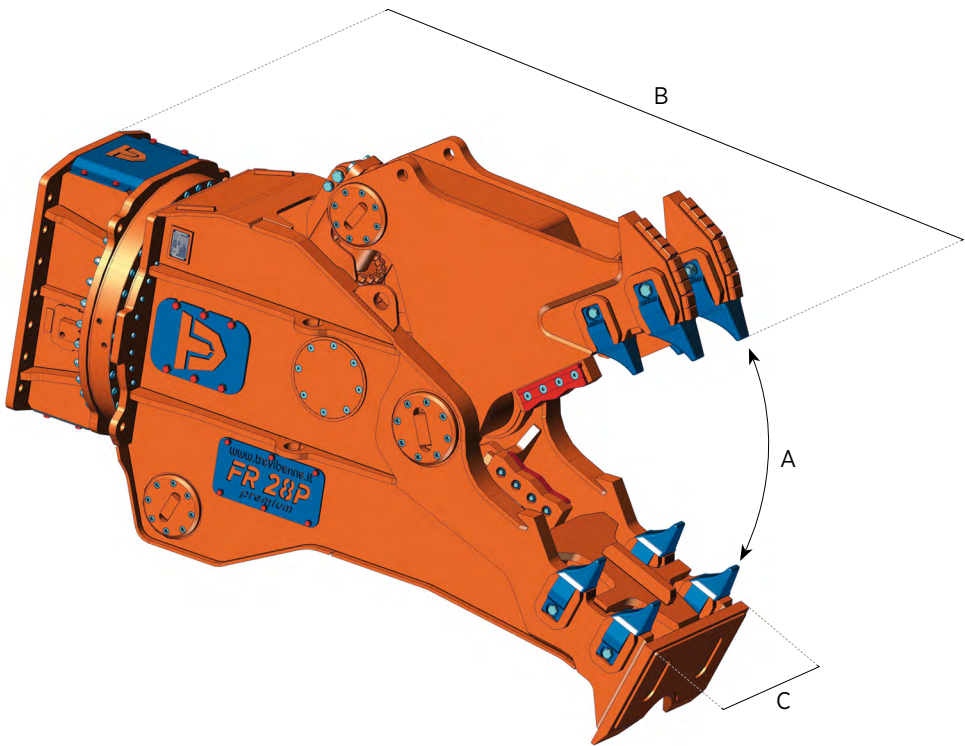

model	⁽²⁾ 15	⁽¹⁾ ton	⁽²⁾ 23
FR 18P	16	21	21
FR 23P	21	22	30
FR 28P	28	29	38
FR 38P	34	36	53

■ (1) Optymalna kombinacja koparka - osprzęt
Optimum excavator - equipment combination

■ (2) Możliwa kombinacja koparka - osprzęt
Possible excavator - equipment combination



		FR 18P	FR 23P	FR 28P	FR 38P
	kg.	2130	2760	3260	4000
A	mm.	755	890	950	1020
B	mm.	2120	2450	2470	2620
C	mm.	530	550	615	695
	mm.	220	260	260	260
	∅ max	40	45	50	60
	bar	250	250	250	250
	l/min.	130 / 200	180 / 250	230 / 300	250 / 300
	∅ max	140	140	140	140
	l/min.	20 / 40*	20 / 40*	25 / 50*	25 / 50*

*Podwójny silnik / *Double motor



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY